



Radius Scupper




Straight Spillway

Choose Dimensions




Company Name Job Name Phone Reference # Email

Smooth Flow Radius Scupper



Smooth Flow Scupper



Arch Flow Scupper



- A. B.
- C.

Material






Inlet Location

🗌 Back Side

Bottom Side

Quanity:_____




THEOUTDOORPLUS.COM | TOPFIRES.COM | P: 909.460.5579 F: 909.460.5530

Standard Inlet is 1.5". All scuppers include an attached sheet of perforated material for more grip with the adhesive.

Flow Rate is 7-10 GPM/FT. Grounding Lug Located on Back. Stainless Steel not recomended for Salt Water Environments. All Sales Final.

U-Shaped Scupper


Choose Dimensions



Quanity:____



Box Scupper



V-Shape Style

Choose Dimensions

Α.	γ_{\wedge}
В.	
С.	C
D.	
Material	1"
Patina Copper	
🗌 Raw Copper	
🗌 Stainless Steel	
Inlet Location	B
🔲 Back Side	D
Bottom Side	
Quanity:	

Company Name Job Name Phone Reference # Email


Scoop Style

A.

В.


C.

D.




Single V Scupper

Quanity:



Cannon Scupper



Quanity:_

THEOUTDOORPLUS.COM | TOPFIRES.COM | P: 909.460.5579 F: 909.460.5530

Standard Inlet is 1.5". All scuppers include an attached sheet of perforated material for more grip with the adhesive.

Flow Rate is 7-10 GPM/FT. Grounding Lug Located on Back. Stainless Steel not recomended for Salt Water Environments. All Sales Final.

Rain Fall Scupper

Choose Dimensions

A.		
В.		
C.		

Material

- Patina Copper
- 🗌 Raw Copper
- 🗌 Stainless Steel

Inlet Location

□ Short Side


□ Long Side

Quanity:_


Β Α (2.25" 1″



Angled Mini Scupper



Boxed Mini Scupper

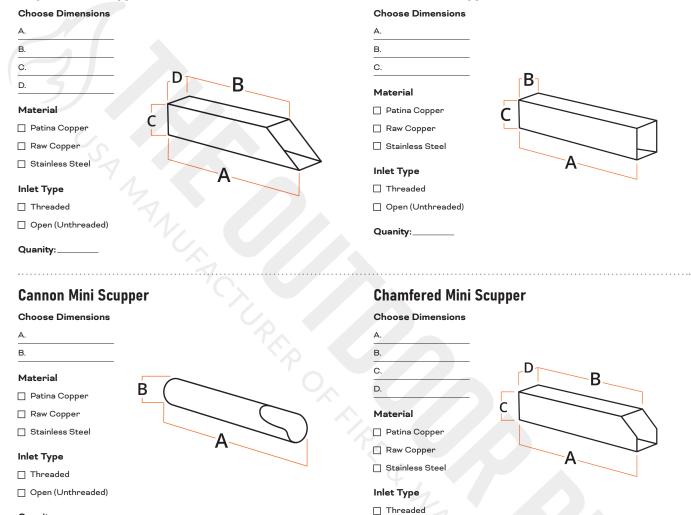

Quanity:_____

Open (Unthreaded)

Quanity:

Scalloped Mini Scupper

Choose Dimensions A В. C. D. D B Material Patina Copper С 🗌 Raw Copper Stainless Steel Inlet Type □ Threaded Open (Unthreaded) Quanity:_

THEOUTDOORPLUS.COM | TOPFIRES.COM | P: 909.460.5579 F: 909.460.5530

Standard Inlet is 1.5". All scuppers include an attached sheet of perforated material for more grip with the adhesive.

Flow Rate is 7-10 GPM/FT. Grounding Lug Located on Back. Stainless Steel not recomended for Salt Water Environments. All Sales Final.

ALTISIMO WALL SCUPPER - CUSTOM FORM



